


 **Sealed Air**

CelluPlank[®] E-24

Low Density / High Performance Plank Foam



A New Level of Performance

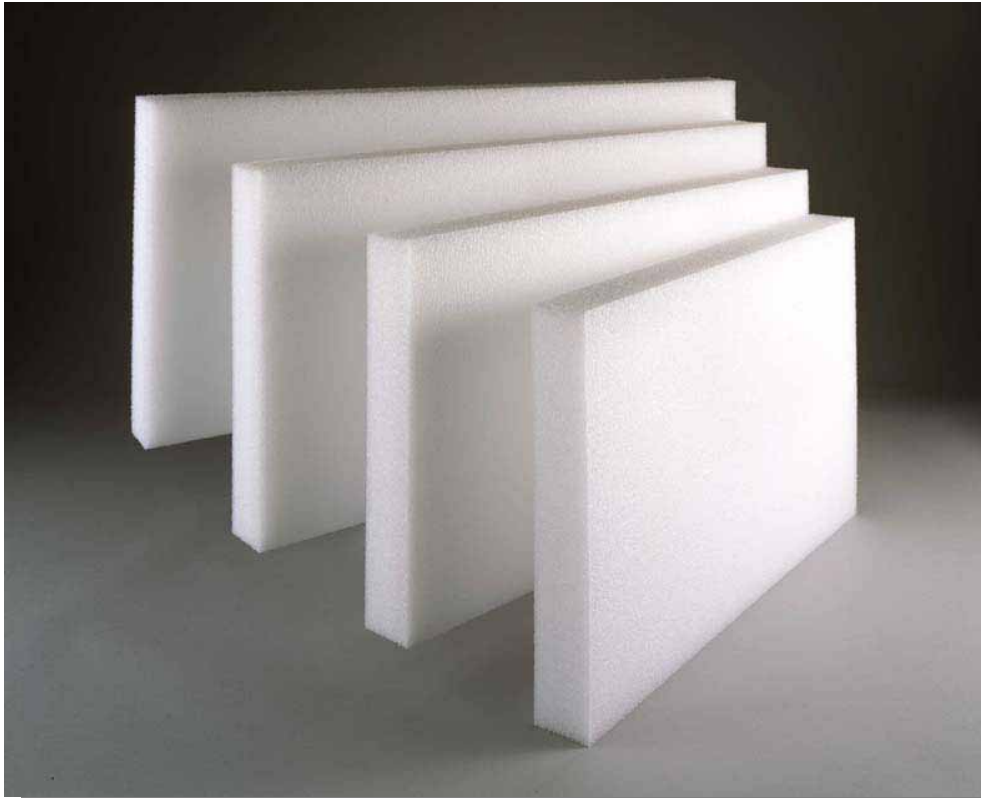

Light weight CelluPlank[®] foam with the performance of higher density product.


CelluPlank® E-24 / 24" Plank Foam

CelluPlank® E-24 Low Density / High Performance foam is developed with the latest in resin and extrusion technology. It is a cost effective packaging material with the cushioning performance of a much higher density foam. It is available in 24" width and is designed for loadings of 1.5 psi and under.

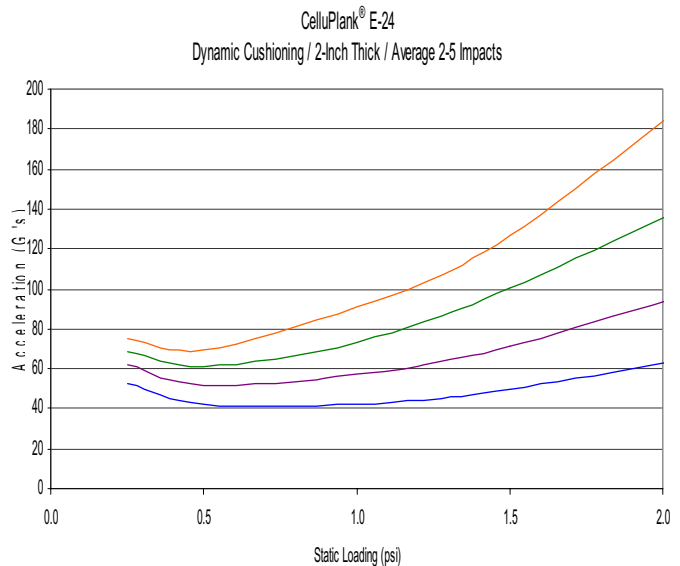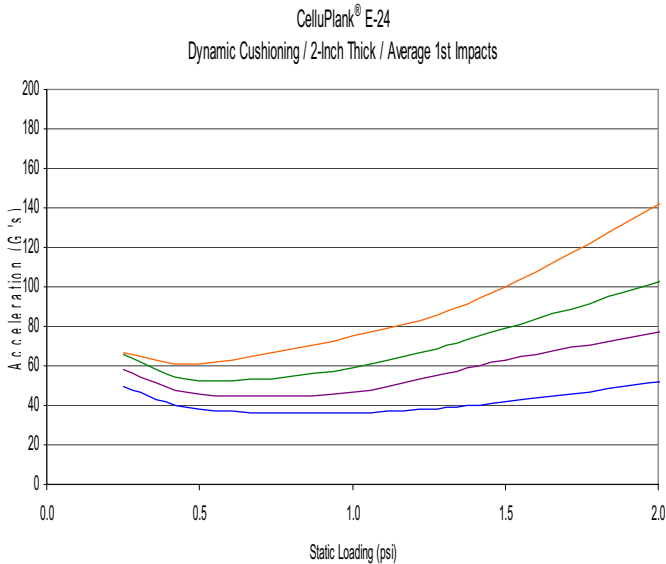

CelluPlank® E-24		
Property	ASTM Method	Typical Values
Compressive Strength Vertical Direction @ 25%/50% psi	ASTM D3575-00 Suffix D	6.5 / 13.5
Compression Creep (%) @ 1.5 psi/168 hrs. @ 1.5 psi/1000 hrs.	ASTM D3575-00 Suffix B	5 9
Density Range (lb/ft³)	ASTM D3575-00	1.2 – 1.4
Tensile Strength @ ½" Thickness MD/CMD psi	ASTM D3575-00 Suffix T	26 / 22
Tear Resistance (lb/in)	ASTM D3575-00 Suffix G	7

CelluPlank® E-24		
Size	Color	Bft.
1 ½" x 24" x 108"	Natural	27
2" x 24" x 108"	Natural	36

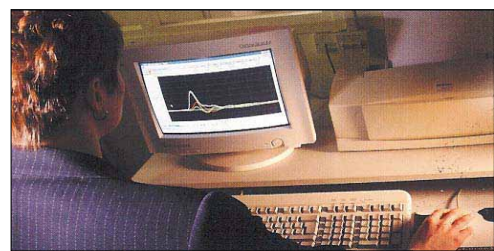

Fabricated / Distributed by:



Sealed Air Limited
Specialty Materials, Telford Way
Kettering
Northants
NN16 8 UN, UK
specialty materials-emea@sealedair.com
www.sealedair-emea.com

Our Products Protect Your Products®

CORPORATE HEADQUARTERS: Park 80 East, Saddle Brook, NJ 07663
INTERNATIONAL: Offices throughout North and South America, Europe, Africa, Asia, and Australia.

®Reg. U.S. Pat. Off. © Sealed Air Corporation 2002. All Rights Reserved.
Printed in the U.S.A.

PFD 4/03